


# TE IGUAL FIG.130

- Fabricado en A-316 (microfusión)
- Extremos roscados EN 10226-1 (ISO 7/1).
- Elemento normalizado según ISO 4144
- Presión máxima 150 psi (10 bar).
- Temperatura máxima de operación 220 °C.

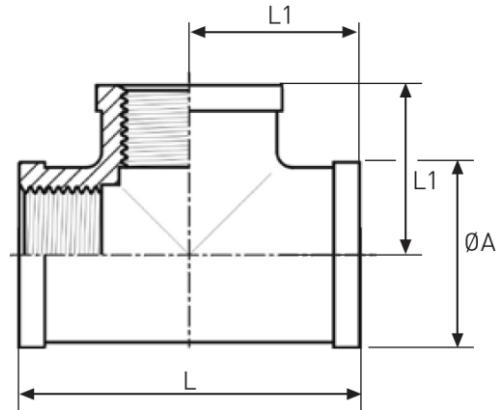

Código	DN	n A (mm)	L1 (mm)	L (mm)	Bolsa (uds.)	Peso (kg/u.)
T130I006	1/8"	17,0	19,0	36	10	0,05
T130I008	1/4"	21,3	21,0	42	10	0,08
T130I010	3/8"	23,5	23,6	48	10	0,10
T130I015	1/2"	30,0	28,0	57	10	0,15
T130I020	3/4"	35,0	33,0	66	10	0,22
T130I025	1"	43,0	38,0	76	10	0,36
T130I032	1.1/4"	52,0	45,0	91	5	0,57
T130I040	1.1/2"	58,5	50,0	98	5	0,67
T130I050	2"	71,5	58,0	114	5	1,05
T130I065	2.1/2"	87,0	70,0	135	2	1,75
T130I080	3"	100,0	78,5	154	2	1,95
T130I100	4"	125,0	97,0	196	1	3,22