


TE REDUCIDA FIG.132

- Acero Inoxidable 1.4408 / A-316
- Presión máxima 10 bar (150 PSI)
- Extremos roscados EN 10226-1 (ISO 7/1)

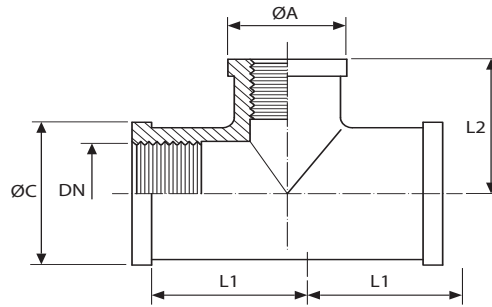

DN	ØA mm	ØC mm	L1 mm	L2 mm	Peso kg/u.
1/4 x 1/8"	17,0	21,0	18,0	19,0	0,06
3/8 x 1/4"	21,0	23,0	20,0	22,0	0,07
1/2 x 3/8"	23,5	29,0	26,0	25,0	0,12
3/4 x 1/2"	30,0	37,0	30,0	32,0	0,23
1" x 1/2"	30,5	44,0	32,0	33,4	0,31
1" x 3/4"	35,8	44,0	35,0	35,0	0,32
1.1/4" x 1/2"	28,8	51,4	34,0	38,0	0,33
1.1/4" x 3/4"	35,8	51,4	38,0	40,0	0,34
1.1/4" x 1"	43,3	51,4	40,0	42,0	0,43
1.1/2" x 1/2"	28,8	57,9	35,0	42,0	0,42
1.1/2" x 3/4"	35,8	57,9	38,0	43,0	0,47
1.1/2" x 1"	43,3	57,9	41,0	45,0	0,52
1.1/2" x 1.1/4"	51,4	57,9	45,0	48,0	0,58
2" x 1/2"	28,8	71,0	38,0	48,0	0,59
2" x 3/4"	35,8	71,0	41,0	49,0	0,66
2" x 1"	43,3	71,0	44,0	51,0	0,74
2" x 1.1/4"	51,4	71,0	48,0	54,0	0,79
2" x 1.1/2"	57,9	71,0	52,0	55,0	0,87