


CRUZ HEMBRA FIG. 180

- Fabricado en A-316 (microfusión)
- Extremos roscados EN 10226-1 (ISO 7/1).
- Presión máxima 150 psi (10 bar).
- Temperatura máxima de operación 220 °C.

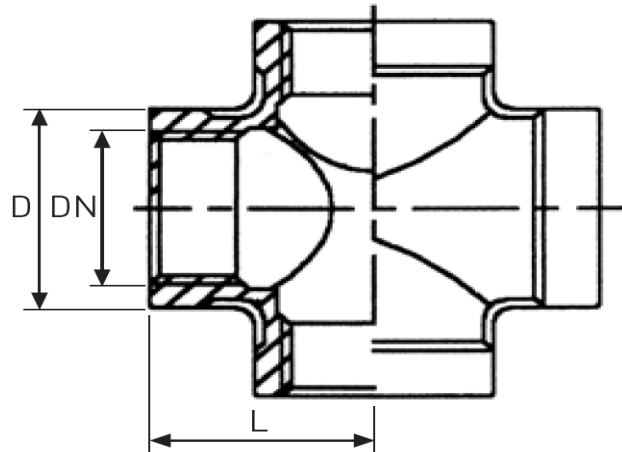

Código	DN	D (mm)	L (mm)	Bolsa (uds.)	Peso (kg/u.)
CR180I006	1/8"	15,2	17,0	10	0,038
CR180I008	1/4"	19,7	18,5	10	0,072
CR180I010	3/8"	23,3	22,9	10	0,103
CR180I015	1/2"	28,0	26,8	10	0,144
CR180I020	3/4"	34,8	32,0	10	0,249
CR180I025	1"	43,6	37,5	10	0,435
CR180I032	1.1/4"	53,0	45,9	5	0,701
CR180I040	1.1/2"	58,0	47,6	5	0,768
CR180I050	2"	71,0	58,0	5	1,258
CR180I065	2.1/2"	87,0	69,0	2	1,770
CR180I080	3"	99,0	77,0	1	2,031
CR180I100	4"	125,0	97,0	1	3,490