

ENLACE C/JUNTA PTFE M-H FIG.331


Acero Inoxidable 1.4404 / A-316L

Presión máxima:


10 bar

150 PSI Extremos roscado

EN ISO 228-1

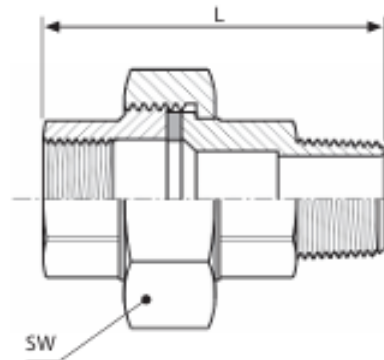

DN	L mm	SW mm	Peso kg/u.
1/8"	40,0	25,0	0,06
1/4"	50,0	30,0	0,10
3/8"	50,0	35,0	0,13
1/2"	58,0	42,0	0,23
3/4"	67,0	47,0	0,31
1"	68,3	53,0	0,39
1.1/4"	83,0	71,0	0,84
1.1/2"	86,3	78,0	0,94
2"	94,0	92,0	1,45
2.1/2"	113,0	112,0	2,35
3"	127,0	126,0	3,43
4"	154,5	157,0	5,87



DN	L mm	SW mm	Peso kg/u.
1/8"	40,0	25,0	0,06
1/4"	50,0	30,0	0,10
3/8"	50,0	35,0	0,13
1/2"	58,0	42,0	0,23
3/4"	67,0	47,0	0,31
1"	68,3	53,0	0,39
1.1/4"	83,0	71,0	0,84
1.1/2"	86,3	78,0	0,94
2"	94,0	92,0	1,45
2.1/2"	113,0	112,0	2,35
3"	127,0	126,0	3,43
4"	154,5	157,0	5,87