


TORNILLO CILÍNDRICO CON HEXÁGONO INTERIOR

HEXAGON SOCKET HEAD CAP SCREWS

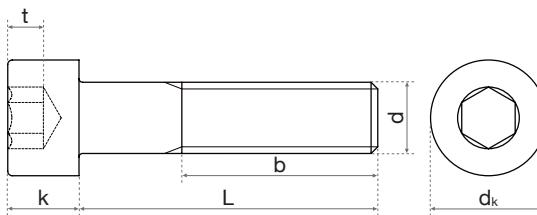

Inox	A2	■
Inox	A4	■
Acero	8.8	■
Acero	10.9	■
Acero	12.9	■


d	M1,6	M2	M2,5	M3	M4	M5	M6
L							
3	■						
4	■	■					
5	■	■	■				
6				■			
8				■			
10				■			
12				■			
14				■			
16				■			
18							
20					■		
22					■		
25				■			
30							
35							
40							
45							
50							
55							
60							
65							
70							
75							
80							
85							
90							
95							
100							
110							
120							
130							
140							
150							
160							
170							
180							
190							
200							

b*	15	16	17	18	20	22	24
t _{min.}	0,7	1	1,1	1,3	2	2,5	3
s	1,5	1,5	2	2,5	3	4	5
k _{max.}	1,6	2	2,5	3	4	5	6
dk	3	3,8	4,5	5,5	7	8,5	10

*Longitud constante de la rosca (siempre que L sea superior a b)

TORNILLO CILÍNDRICO CON HEXÁGONO INTERIOR

HEXAGON SOCKET HEAD CAP SCREWS

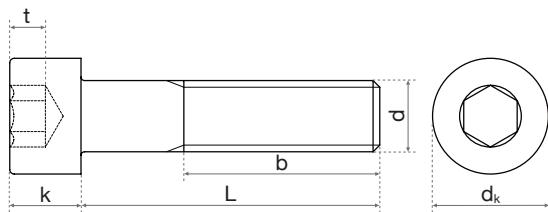

Inox	A2	■
Inox	A4	■
Acero	8.8	■
Acero	10.9	■
Acero	12.9	■

	M8	M10	M12	M14	M16	M18	M20	M22	M24																																
L	10	12	14	16	18	20	22	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	300


b*	28	32	36	40	44	48	52	56	60
t_{min.}	4	5	6	7	8	9	10	11	12
s	6	8	10	12	14	14	17	17	19
k_{max.}	8	10	12	14	16	18	20	22	24
dk	13	16	18	21	24	27	30	33	36

*Longitud constante de la rosca (siempre que L sea superior a b)

Medidas indicadas en mm

TORNILLO CILÍNDRICO CON HEXÁGONO INTERIOR

HEXAGON SOCKET HEAD CAP SCREWS

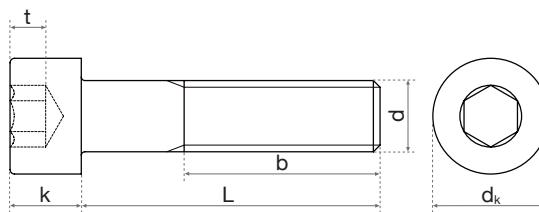

Inox	A2	■
Inox	A4	■
Acero	8.8	■
Acero	10.9	■
Acero	12.9	■

d	M27	M30	M33	M36	M39	M42	M45	M48
L								
50								
55								
60								
65								
70								
75								
80								
85								
90								
100								
110								
120								
130								
140								
150								
160								
170								
180								
190								
200								
210								
220								
230								
240								
250								
260								
270								
280								
300								

b*	66	72	78	84	90	96	100	108
t _{min.}	13,5	15,5	18	19	21	24	26	28
s	19	22	24	27	27	32	32	36
k _{max.}	27	30	33	36	39	42	45	48
dk	40	45	50	54	58	63	68	72

*Longitud constante de la rosca (siempre que L sea superior a b)

Medidas indicadas en mm