



## ACOPLAMIENTO ELÁSTICO SINCRON SERIE 50




Tipos: 51 al 54

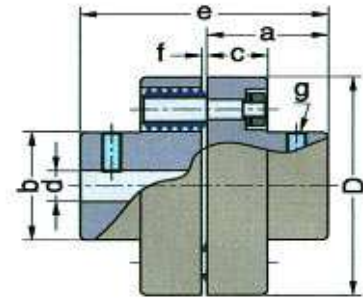


Tipos: 55 al 5013

### Dimensiones de los acoplamientos elásticos serie 50

TIPO	N / n	H.P. a 100 r.p.m.	Velocidad máxima (r.p.m.)	d máximo	d mínimo	D	a	b	c	e	f	g	Nº pernos	Peso (Kg.)	PD <sup>2</sup> Kgm <sup>2</sup>
51	0,0053	0,53	9.500	20	7	70	30	32	20	63	3	M4 x 10	6	1,1	0,0019
52	0,010	1,00	7.800	28	9	85	40	45	20	83	3	M6 x 15	8	1,9	0,0040
53	0,017	1,70	6.300	35	10	105	50	56	25	103	3	M6 x 20	6	3,4	0,0122
54	0,042	4,20	5.300	40	12	125	55	64	25	113	3	M6 x 20	8	5	0,0263
55	0,079	7,90	4.500	50	15	150	65	80	32	133	3	M8 x 25	6	9,2	0,0705
56	0,13	13	3.700	63	18	180	85	105	32	173	3	M10 x 35	8	16,7	0,139
57	0,22	22	3.200	75	20	210	110	120	45	225	5	M12 x 40	8	28,6	0,400
58	0,40	40	2.600	90	25	250	120	150	45	245	5	M12 x 50	12	45	0,903
59	0,66	66	2.200	110	30	300	130	176	55	265	5	M16 x 55	12	62,5	1,840
510	1	100	1.900	120	35	350	150	190	55	305	5	M16 x 60	14	106	3,630
5011	1,4	140	1.300	140	80	400	180	225	55	365	5	M16 x 70	16	206	10
5012	1,7	170	1.000	160	90	475	220	270	75	445	5	M20 x 90	14	360	27
5013	2,6	260	700	200	100	555	250	350	75	505	5	M20 x 125	16	540	82



Tipos: 51 al 54



Tipos: 55 al 5013

